



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road

Newport  
South Wales  
NP10 8QPO

REC'D 17 MAY 2004

PCT


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

BEST AVAILABLE COPY

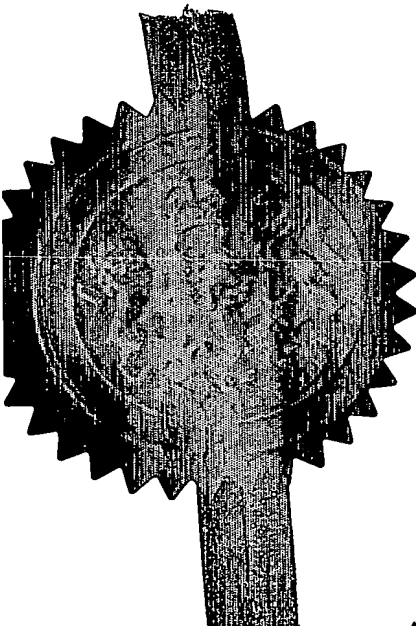

Signed *Andrew Gensey*  
Dated 7 May 2004

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The  
Patent  
Office

THE PATENT OFFICE  
D

21 MAR 2003

NEWPORT

ZIMAR03 E794061-4 002835  
P01/7760 0.00-0306492.0

The Patent Office\*

Cardiff Road  
Newport  
South Wales  
NP9 1RH

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

WMO/JAW/P200422

2. Patent application number

(The Patent Office will fill in this part)

0306492.0

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Orr, William McLean  
8th Floor, Tower House  
Merrion Way  
Leeds, LS2 8PA

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

8420713002

4. Title of the invention

Jaw crusher

5. Name of your agent (if you have one)

Urquhart-Dykes & Lord

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Tower House  
Merrion Way  
Leeds  
LS2 8PA

Patents ADP number (if you know it)

1644004

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

## JAW CRUSHER

This invention relates to a jaw crusher having two jaws which define an upwardly open crushing chamber for receiving crushable material and a discharge opening between the lower ends of the jaws for discharging crushed material, the jaws being relatively movable so as to vary the size of the receiving chamber and thereby exert a working action on the crushable material.

Jaw crushers are used in a quarry environment to crush rocks to smaller size, and usually have a fixed jaw and a pivotally mounted movable jaw which is driven towards and away from the fixed jaw so as to carry out repeated cycles of crushing and relieving action on the material, such that crushed material is formed and then falls under gravity through the discharge opening, and which enables continuous or semi-continuous supply of fresh material to the receiving chamber of the jaw crusher.

Typically the upper end of the movable jaw is caused to oscillate to and fro by an eccentric drive mechanism so as to vary the size of the crushing chamber and a toggle linkage is coupled with a lower region of the movable jaw and can be adjusted so as to increase or decrease the size of the discharge opening, and which also applied to and fro motion to the lower end of the moveable jaw.

The jaws of a jaw crusher are usually provided with wear plates which exert the necessary crushing action on the material, and which are removably mounted so that worn wear plates can be replaced when necessary. Therefore, the wear plates define the actual limits of the crushing chamber, and in conventional jaw crushers no further components intrude into the crushing chamber. This results in the discharge of crushed material from the chamber relying entirely upon gravity action, as the jaws move relatively to and fro during an operating cycle.

However, given the non-uniform nature of rocks being supplied to the crusher, and their possible jamming interengagement with other rock material already in the chamber (partly crushed or not yet crushed), it is usually necessary to stop the operation from time to time when jamming arises, and/or to provide some form of fail-safe mechanism in the drive to the movable jaw, to avoid overloading of any driving components.

Further, if any material becomes jammed in the lower discharge opening, this also feeds back to the material above it which a) increases the load on the drive components and the linkage and b) prevents efficient crushing and subsequent discharge of crushed material from the chamber.

5 The invention therefore seeks, by simple mechanical means, to assist the gravity discharge of crushed material from the crushing chamber.

According to the invention there is provided a jaw crusher having two jaws which define an upwardly open crushing chamber for receiving crushable material and a discharge opening between the lower ends of the jaws for discharging crushed material, the jaws  
10 being relatively movable so as to vary the size of the receiving chamber and thereby exert working and relieving actions on the crushable material and so that crushed material can be discharged via the discharge opening, and in which:

a rotatable elongate member extends throughout at least a major part of the length of the jaws, and is located at or near to the discharge opening so as to assist the gravity  
15 discharge of crushed material through the discharge opening, and / or to exert an impact / crushing action in conjunction with the working action of the jaws.

Preferably, the elongate member extends substantially throughout the length of the jaws (the length of the jaws being measured in a direction perpendicular to the direction of relative movement of the jaws, and from front to rear of the chamber).

20 Conveniently, the member is rotatably mounted on one of the jaws, and preferably at or near to the lower end thereof.

In a preferred arrangement, one of the jaws is a fixed jaw, and the other jaw is mounted to be movable towards and away from the fixed jaw. The movable jaw may be coupled with an eccentric drive mechanism at or near its upper end, and which operates the  
25 movable jaw in a cycle comprising a working stroke approaching the fixed jaw and a relieving stroke moving away from the fixed jaw.

The elongate member preferably has a circular cross section, when the member will effectively be a roller, but it should be understood that other cross-sections may be suitable e.g. elliptical, provided that the engagement of the periphery of the rotating  
30 member with the crushed material assists in the gravity discharge of the material through the discharge opening.

The elongate member may be freely rotatable, and driven by the downward movement of the crushed material. Alternatively, the elongate member may be driven to rotate, to further assist the downward gravity-derived movement of the material. Also, more than one elongate member may be provided e.g. one rotatably mounted on the lower end of each jaw.

Preferably, a toggle or other mechanism is coupled with the lower end of the movable jaw, at a position below the coupling of the eccentric drive mechanism to the movable jaw, and is operative to move the lower end of the jaw to and fro so as to assist the working action of the jaw.

Preferably, the elongate member serves both to assist the gravity discharge material, but may also function as an impact or crushing roller to further assist the crushing action of the jaws, by operating in cooperation with the movement of the lower end of the movable jaw.

Alternatively, the elongate member may be arranged mainly to exert an impact or crushing action, in cooperation with the movement of the lower end of the movable jaw.

A preferred embodiment of jaw crusher according to the invention will now be described in detail, by way of example only, with reference to the accompanying drawing, in which:

Figure 1 is a perspective illustration of a first embodiment of jaw crusher according to the invention, having a fixed jaw and a movable jaw, and showing the jaws in an "open" configuration for receiving a supply of crushable material;

Figure 2 is a perspective illustration from one side of the fixed jaw of the crusher shown in Figure 1;

Figure 3 is a schematic side illustration of a double toggle reciprocating drive linkage coupled to a lower end of the movable jaw of a crusher of the general type shown in Figure 1;

Figure 4 is a similar view to Figure 3, but of a second embodiment of jaw crusher according to the invention;

Figure 5 is a schematic side view illustration of a fly wheel-driven drive mechanism for applying reciprocating linear motion to the upper end of the movable jaw, to carry out working and relieving strokes on the crushable material, and of the general type of jaw crusher of the first embodiment shown in Figure 1; and

Figure 6 is a view, similar to Figure 5, showing the fly wheel drive arrangement coupled with the movable jaw, and applied to a jaw crusher of the type shown in the second embodiment of the invention of Figure 4.

Referring first to Figure 1 of the drawings, a first embodiment of jaw crusher according to the invention is illustrated, designated generally by reference 10, and having two jaws 11 and 12 which define an upwardly open crushing chamber 13 for receiving crushable material, and a discharge opening 14 between the lower ends 15 and 16 of the jaws 11 and 12 respectively, for discharging crushed material.

The jaws 11 and 12 are relatively movable so as to vary the size of the receiving chamber 13 and thereby exert working and relieving actions on the crushable material, and so that crushed material can be discharged via the discharge opening 14.

In the illustrated embodiment, the jaw 11 is a fixed jaw having a front beam 17 and a fixed jaw plate 18, and the jaw 12 is a movable jaw having a wear or jaw plate 19. An eccentric drive mechanism is coupled with the upper end of the movable jaw 12, and is shown schematically only by an eccentric drive 20. A toggle linkage is shown schematically by reference 21, and is coupled with the lower end of the jaw 12.

Also, the toggle linkage applies to and fro movement to the lower end of the movable jaw, to assist the crushing / working action.

The means of applying movement to and fro of a movable jaw of a jaw crusher are well known, and any suitable conventional arrangements may be provided. The "throw" of the eccentric drive 20 will determine the extent of the linear reciprocating movement applied to the upper end of the jaw 12, during a working cycle. Adjustment of the width of the discharge opening 14 also can be carried out by adjustment of the toggle linkage 21.

Referring to Figure 2, this shows in more detail the construction of the fixed jaw 11, and it will be noted that a rotatable elongate member is provided, designated by reference 22, and which extends throughout at least a major part of the length L of the jaw 11, and is located at or near to the discharge opening 14 so as to assist the gravity discharge of crushed material through the opening. In the embodiment of Figure 2, the elongate member 22 takes the form of a roller of circular cross section, and which is rotatably mounted at or near to the lower end of the fixed jaw 11. The member 22 may be freely rotatable, so as to be driven by engagement with the downwardly moving crushed material.

Alternatively, a drive input (not shown) may be coupled with the member 22, to apply continuous rotation and thereby to further assist the gravity discharge of crushed material.

The preferred cross section of the member 22 is circular, so that it forms a roller, but other cross sections may be adopted e.g. elliptical, provided that they permit the periphery of the member to engage with and assist the downward movement of the crushed material.

In addition, the member 22 operates as an impact / crushing roller, which works in cooperation with the moving lower end of the movable jaw, in order to exert additional crushing action. Preferably, the member 22 therefore has a dual function of (a) assisting gravity discharge of crushed material and (b) assisting the overall crushing action exerted by the jaws.

However, in an alternative embodiment of the invention, the member 22 may be arranged to function mainly as an impact / crushing roller.

Referring now to Figure 3 of the drawings, this shows in more detail a jaw crusher of the general type shown in the first embodiment, and corresponding parts are given the same reference numerals. In this embodiment, the elongate member / roller 22 is associated with the fixed jaw 11. Figure 3 shows a double toggle linkage 21a, coupled with the lower end 16 of the movable jaw 12, and driven by a Pitman type drive 23.

Referring now to Figure 4, this is a view, similar to Figure 3, showing double toggle linkage 21a, but in this embodiment, the elongate member / roller 22 is associated with the movable jaw 12.

Referring to Figure 5, this shows in more detail a fly wheel operated drive mechanism to apply linear reciprocating movement to the upper end of the movable jaw 12, and designated generally by reference 24. The elongate member / roller 22 is associated, in this arrangement, with the fixed jaw 11.

Figure 6 is a view, similar to Figure 5, but showing the fly wheel drive arrangement coupled with movable jaw 12, and in which elongate member / roller 22 is associated with the movable jaw 12.

The embodiments of the invention therefore provide one or more rotatable elongate elements which assist the discharge of crushed material via the lower discharge opening, and this therefore increases the rate of production, and provides for improved operating efficiency of the jaw crusher machines of the invention.

## CLAIMS

1. A jaw crusher having two jaws (11, 12) which define an upwardly open crushing chamber (13) for receiving crushable material and a discharge opening (14) between the lower ends (15, 16) of the jaws (11, 12) for discharging crushed material, the jaws (11, 12) being relatively movable so as to vary the size of the receiving chamber (13) and thereby exert working and relieving actions on the crushable material and so that crushed material can be discharged via the discharge opening (14), and in which:

a rotatable elongate member (22) extends throughout at least a major part of the length L of the jaws (11, 12), and is located at or near to the discharge opening (14) so as to assist the gravity discharge of crushed material through the discharge opening (14), and / or to exert an impact / crushing action in conjunction with the working actions of the jaws.

2. A jaw crusher according to claim 1, in which the elongate member (22) extends substantially throughout the length L of the jaws (11, 12).

3. A jaw crusher according to claim 1 or 2, in which the elongate member (22) is rotatably mounted on one of the jaws (11, 12).

4. A jaw crusher according to claim 3, in which the elongate member is rotatably mounted on one of the jaws (11, 12), at or near to the lower end thereof.

5. A jaw crusher according to any one of claims 1 to 4, in which one of the jaws (11) is a fixed jaw, and the other jaw (12) is mounted to be movable towards and away from the fixed jaw (11).

6. A jaw crusher according to claim 5, in which the movable jaw (12) is coupled with an eccentric drive mechanism (20) which operates the movable jaw (12) in a cycle comprising a working stroke approaching the fixed jaw (11) and a relieving stroke moving away from the fixed jaw (11).

7. A jaw crusher according to any one of claims 1 to 6, in which the elongate member (22) has a circular cross section, and comprises a roller.

8. A jaw crusher according to any one of claims 1 to 7, in which the elongate member (22) is freely rotatable, and arranged to be driven by the downward movement of the crushed material.

9. A jaw crusher according to any one of claim 1 to 7, in which the elongate



member (22) is arranged to be driven to rotate, to further assist the downward gravity-derived movement of the material.

10. A jaw crusher according to any one of the preceding claims, having more than one elongate member (22) arranged at or near to the discharge opening (14), so as to assist the gravity discharge of crushed material through the discharge opening (14).

11. A jaw crusher according to any one of the preceding claims, in which a toggle or other mechanism (21) is coupled with one of the jaws and is operative to apply to and fro movement to the lower end of the jaw, which cooperates with said elongate member (22) to exert additional crushing action on the material.

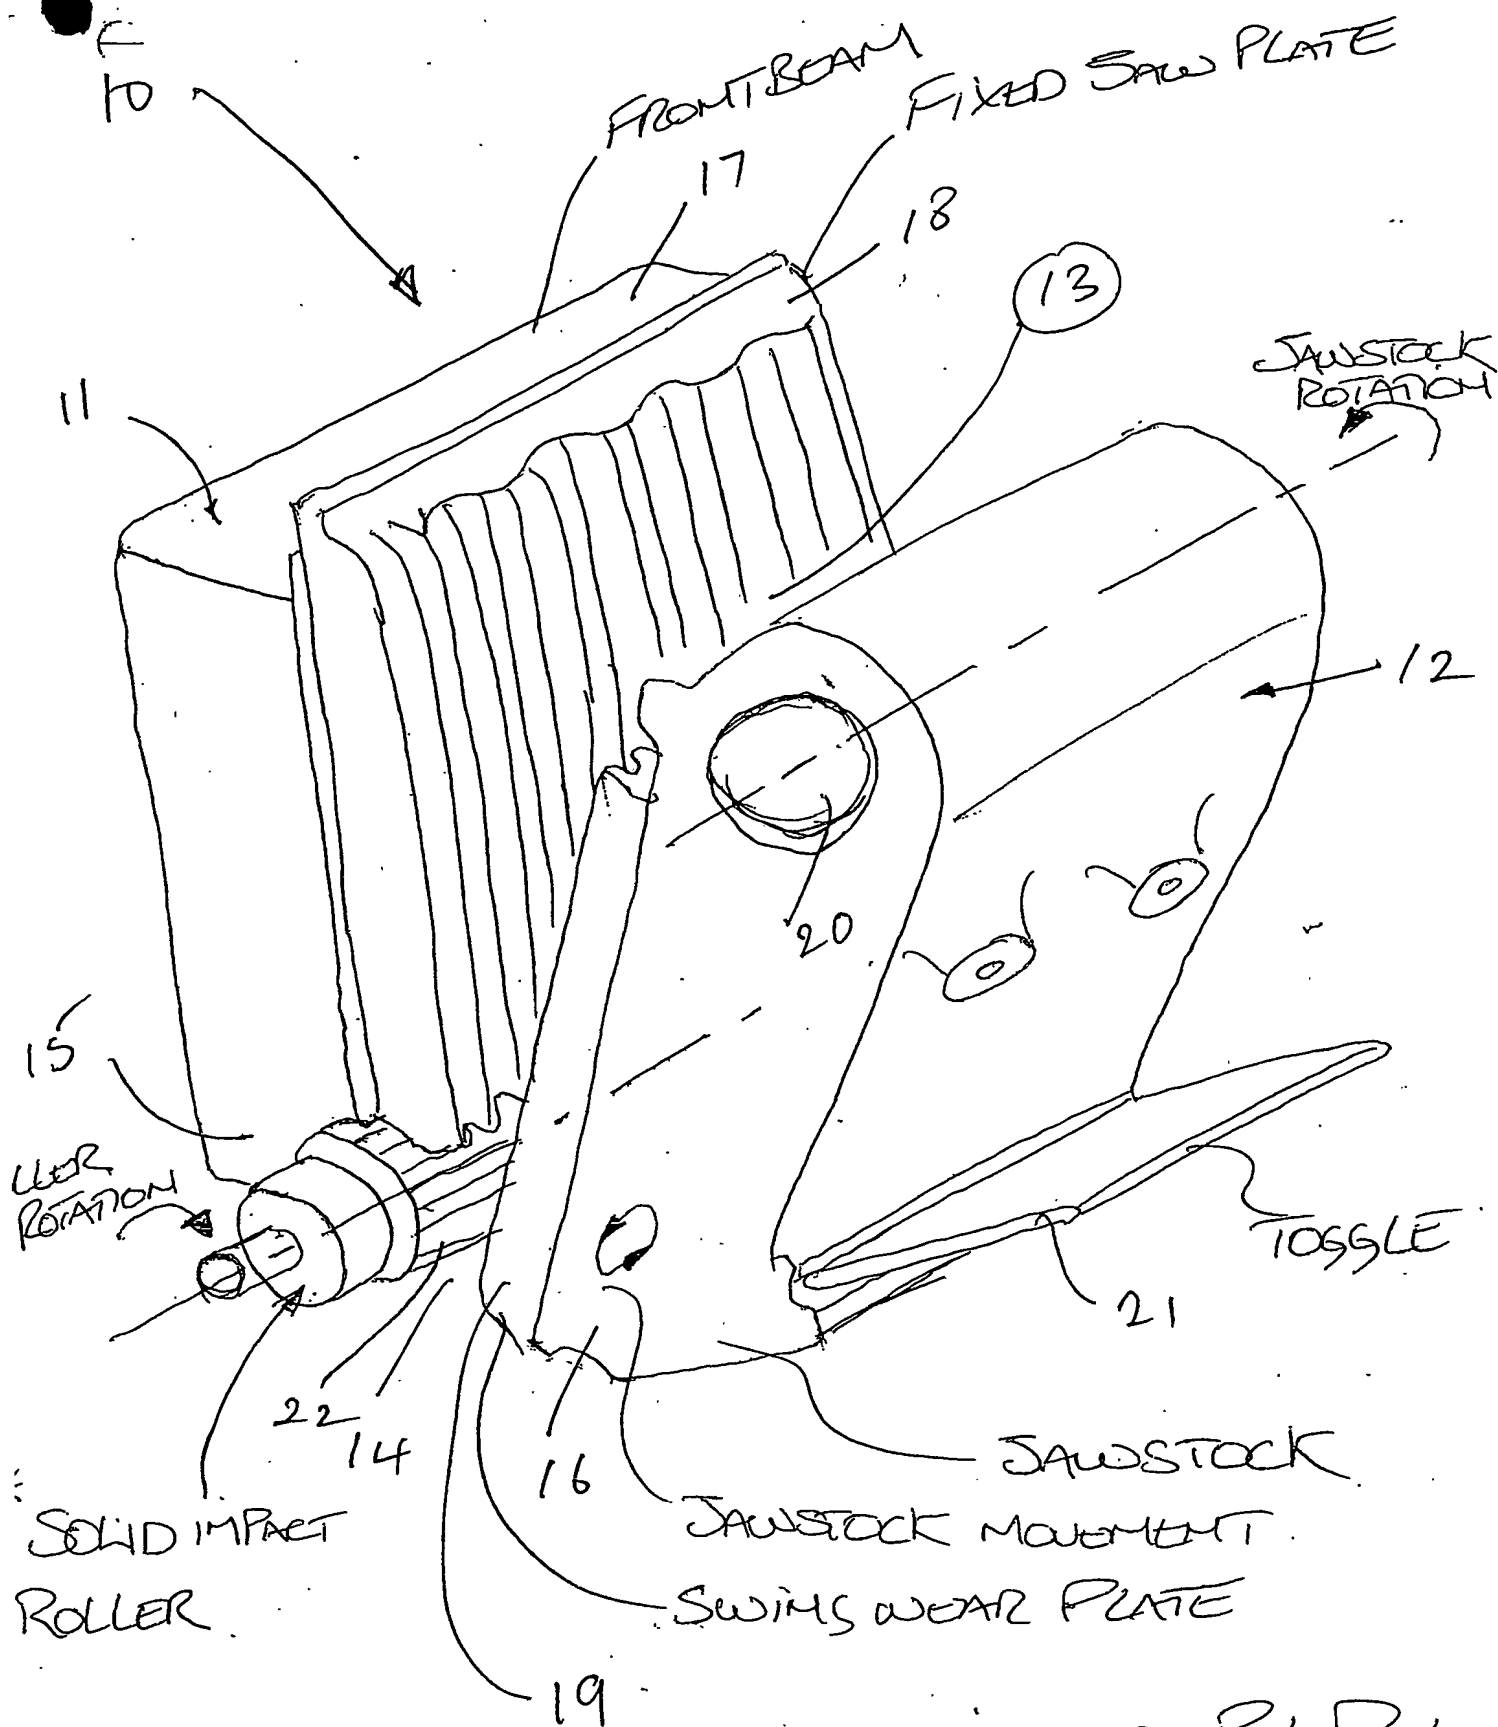


FIG. 1

INVENTOR PAUL PASLAS

28/01/2003


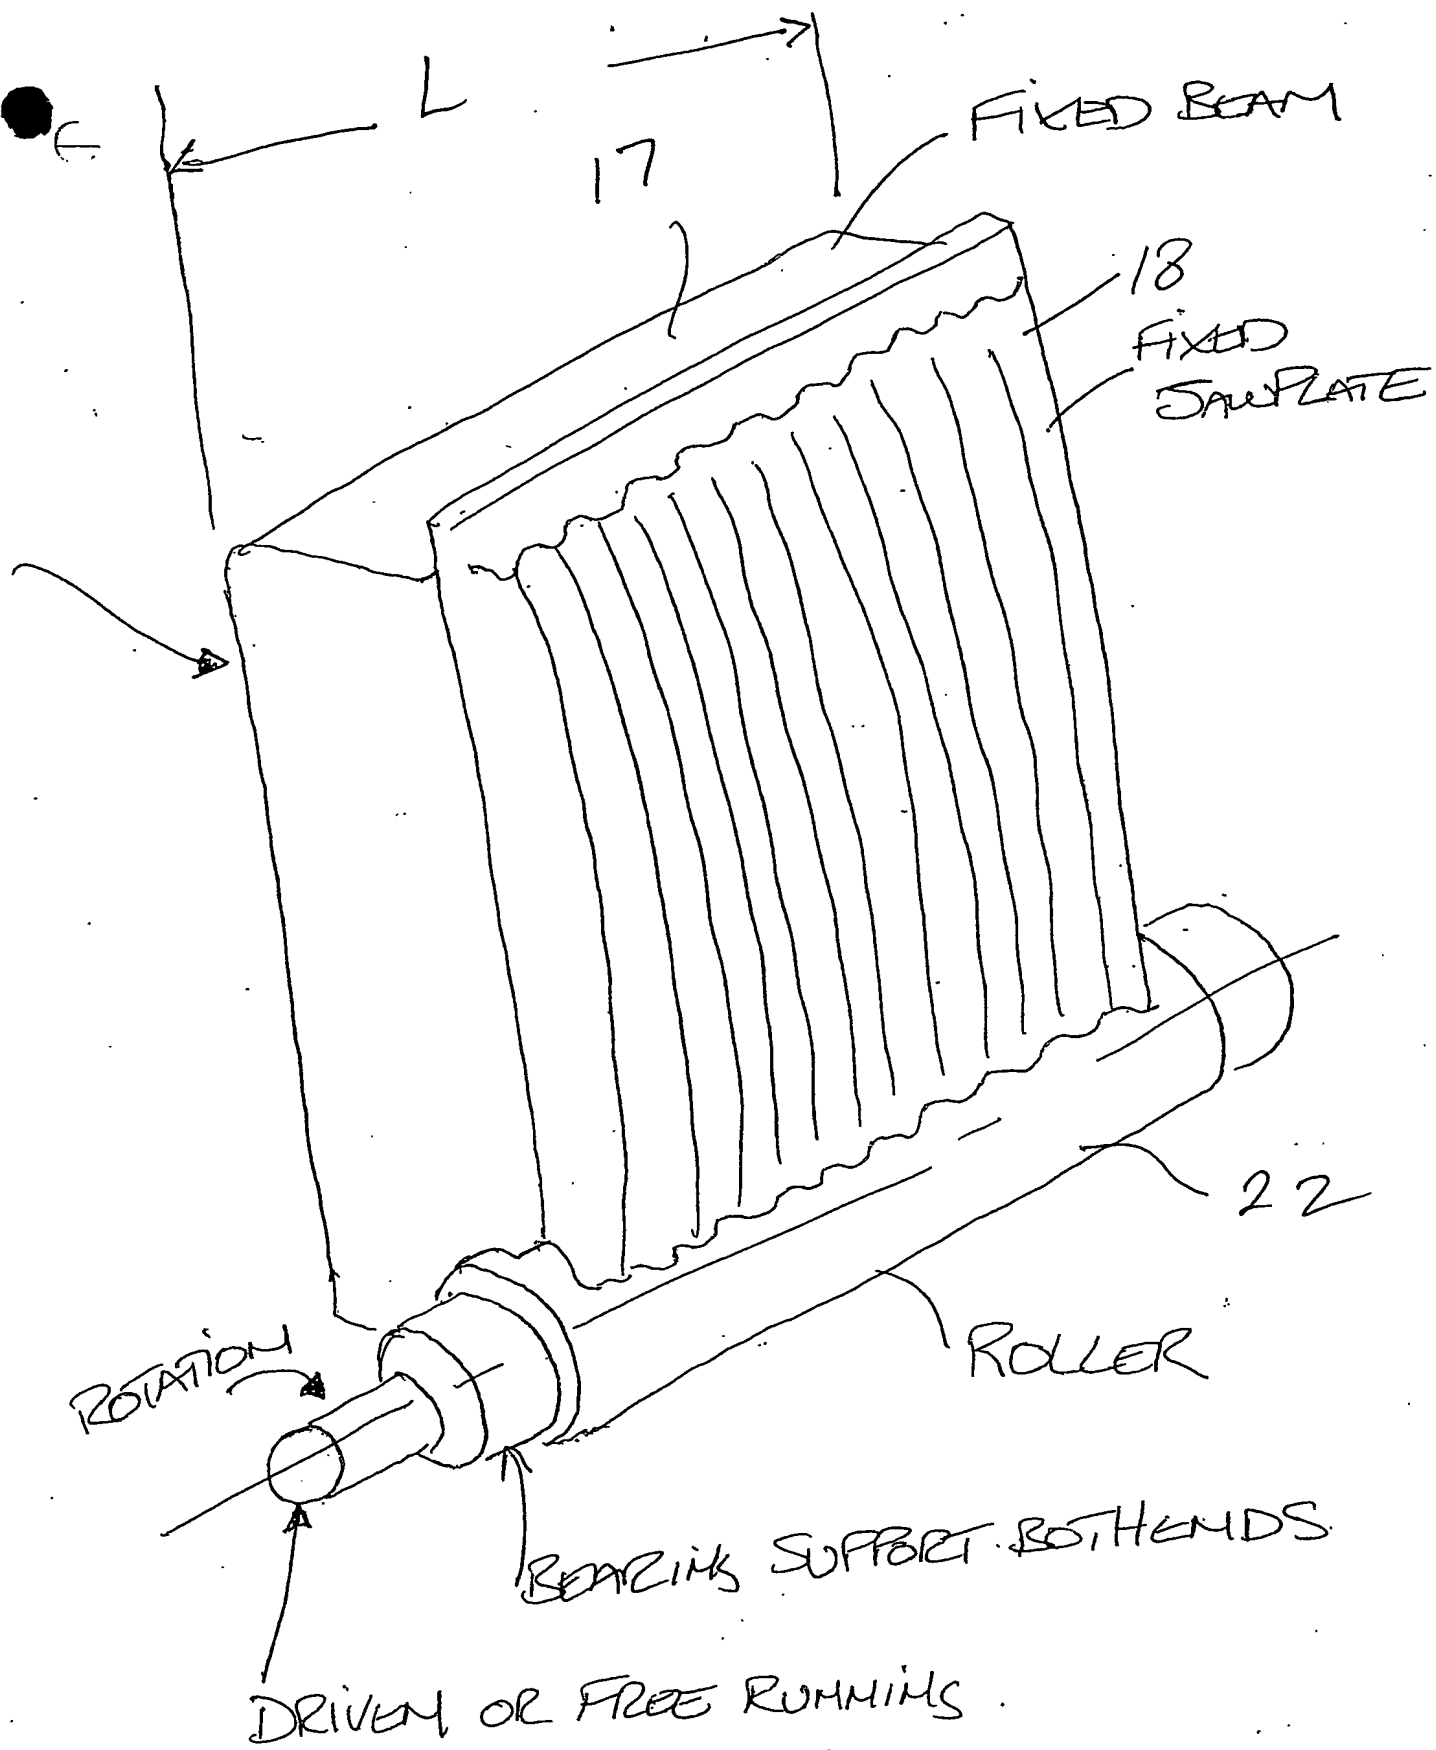


FIG. 2

INVENTOR PAUL DOUGLAS

28/01/2003

# DOUBLE TOGGLE

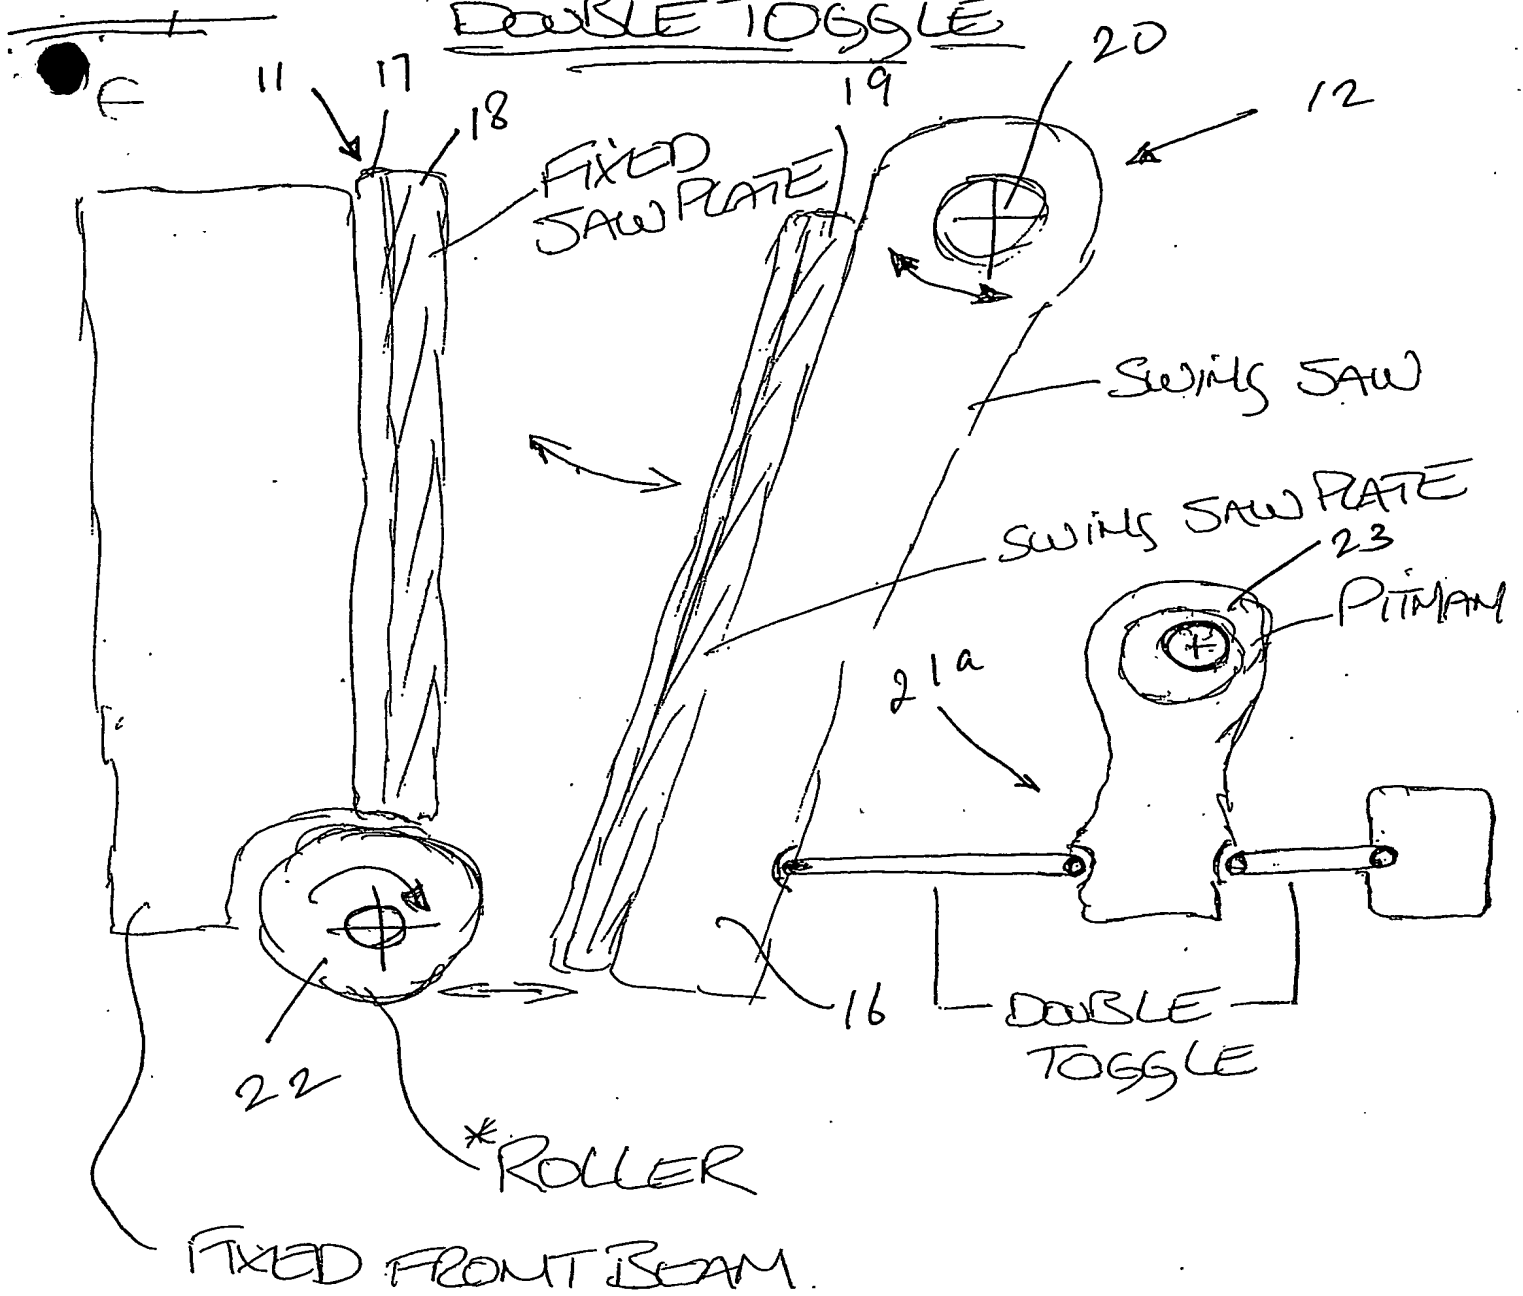


INVENTOR PAUL DOUGLAS

FIG. 3

28/01/2003


# DOUBLE TOGGLE

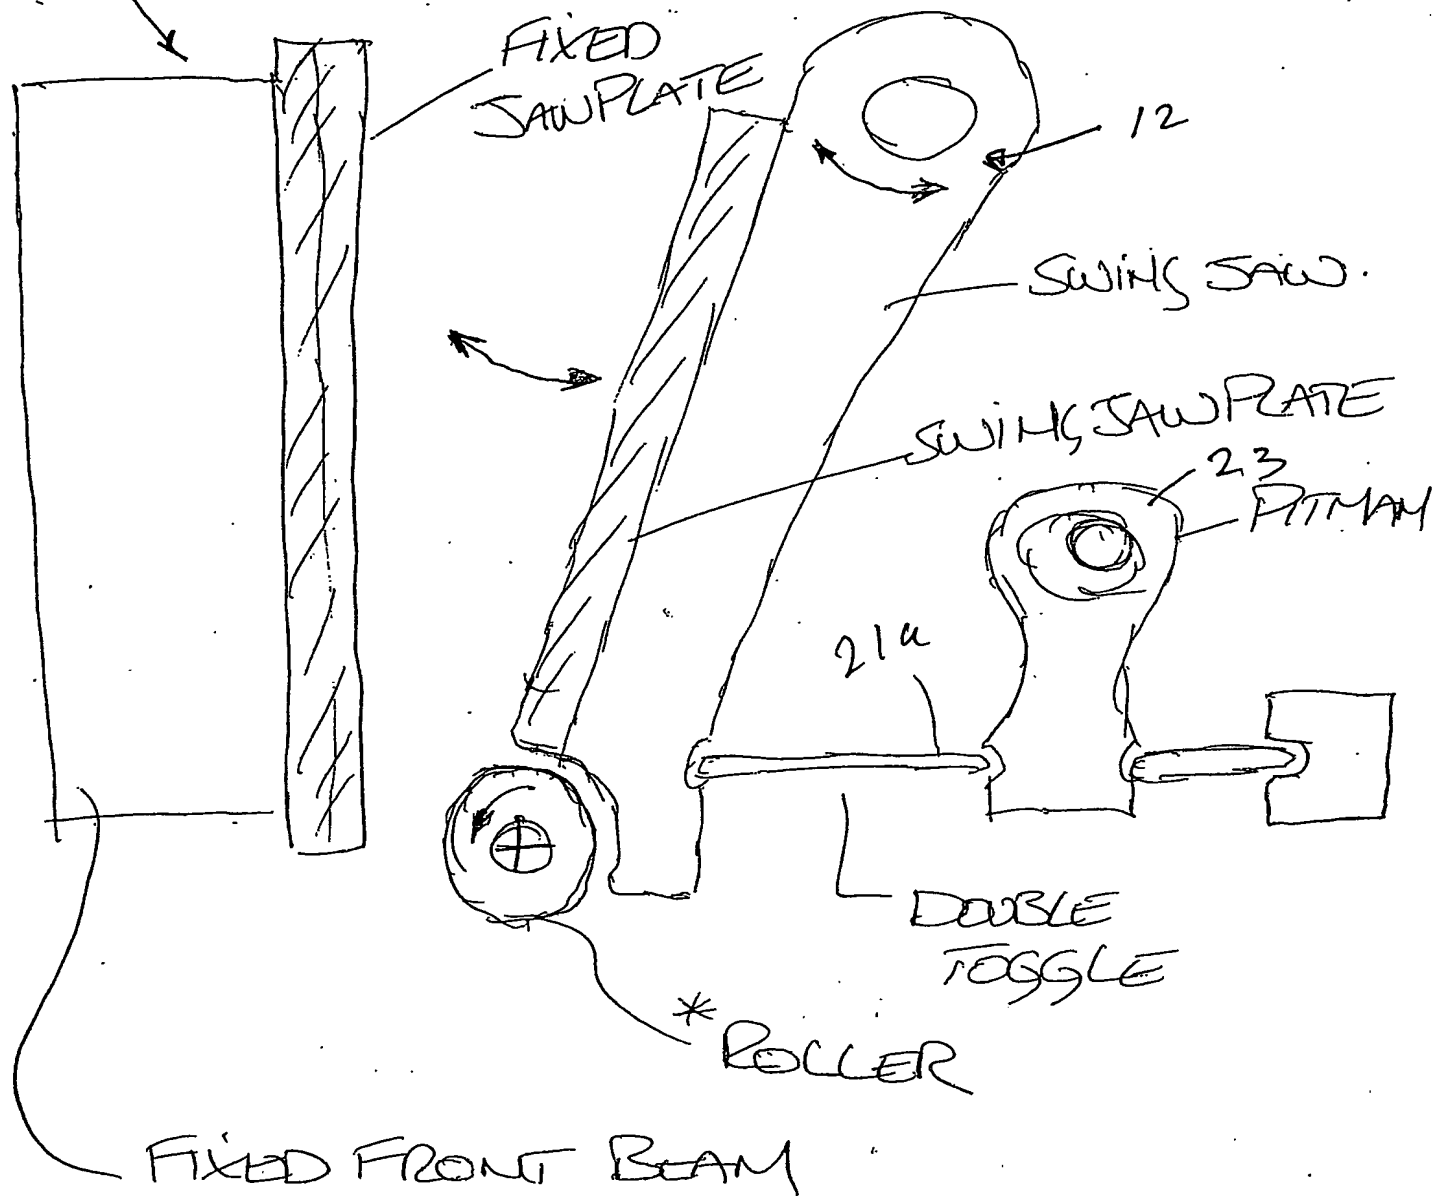

INVENTOR  
PAUL DOUGLAS

FIG. 34


28/01/2003

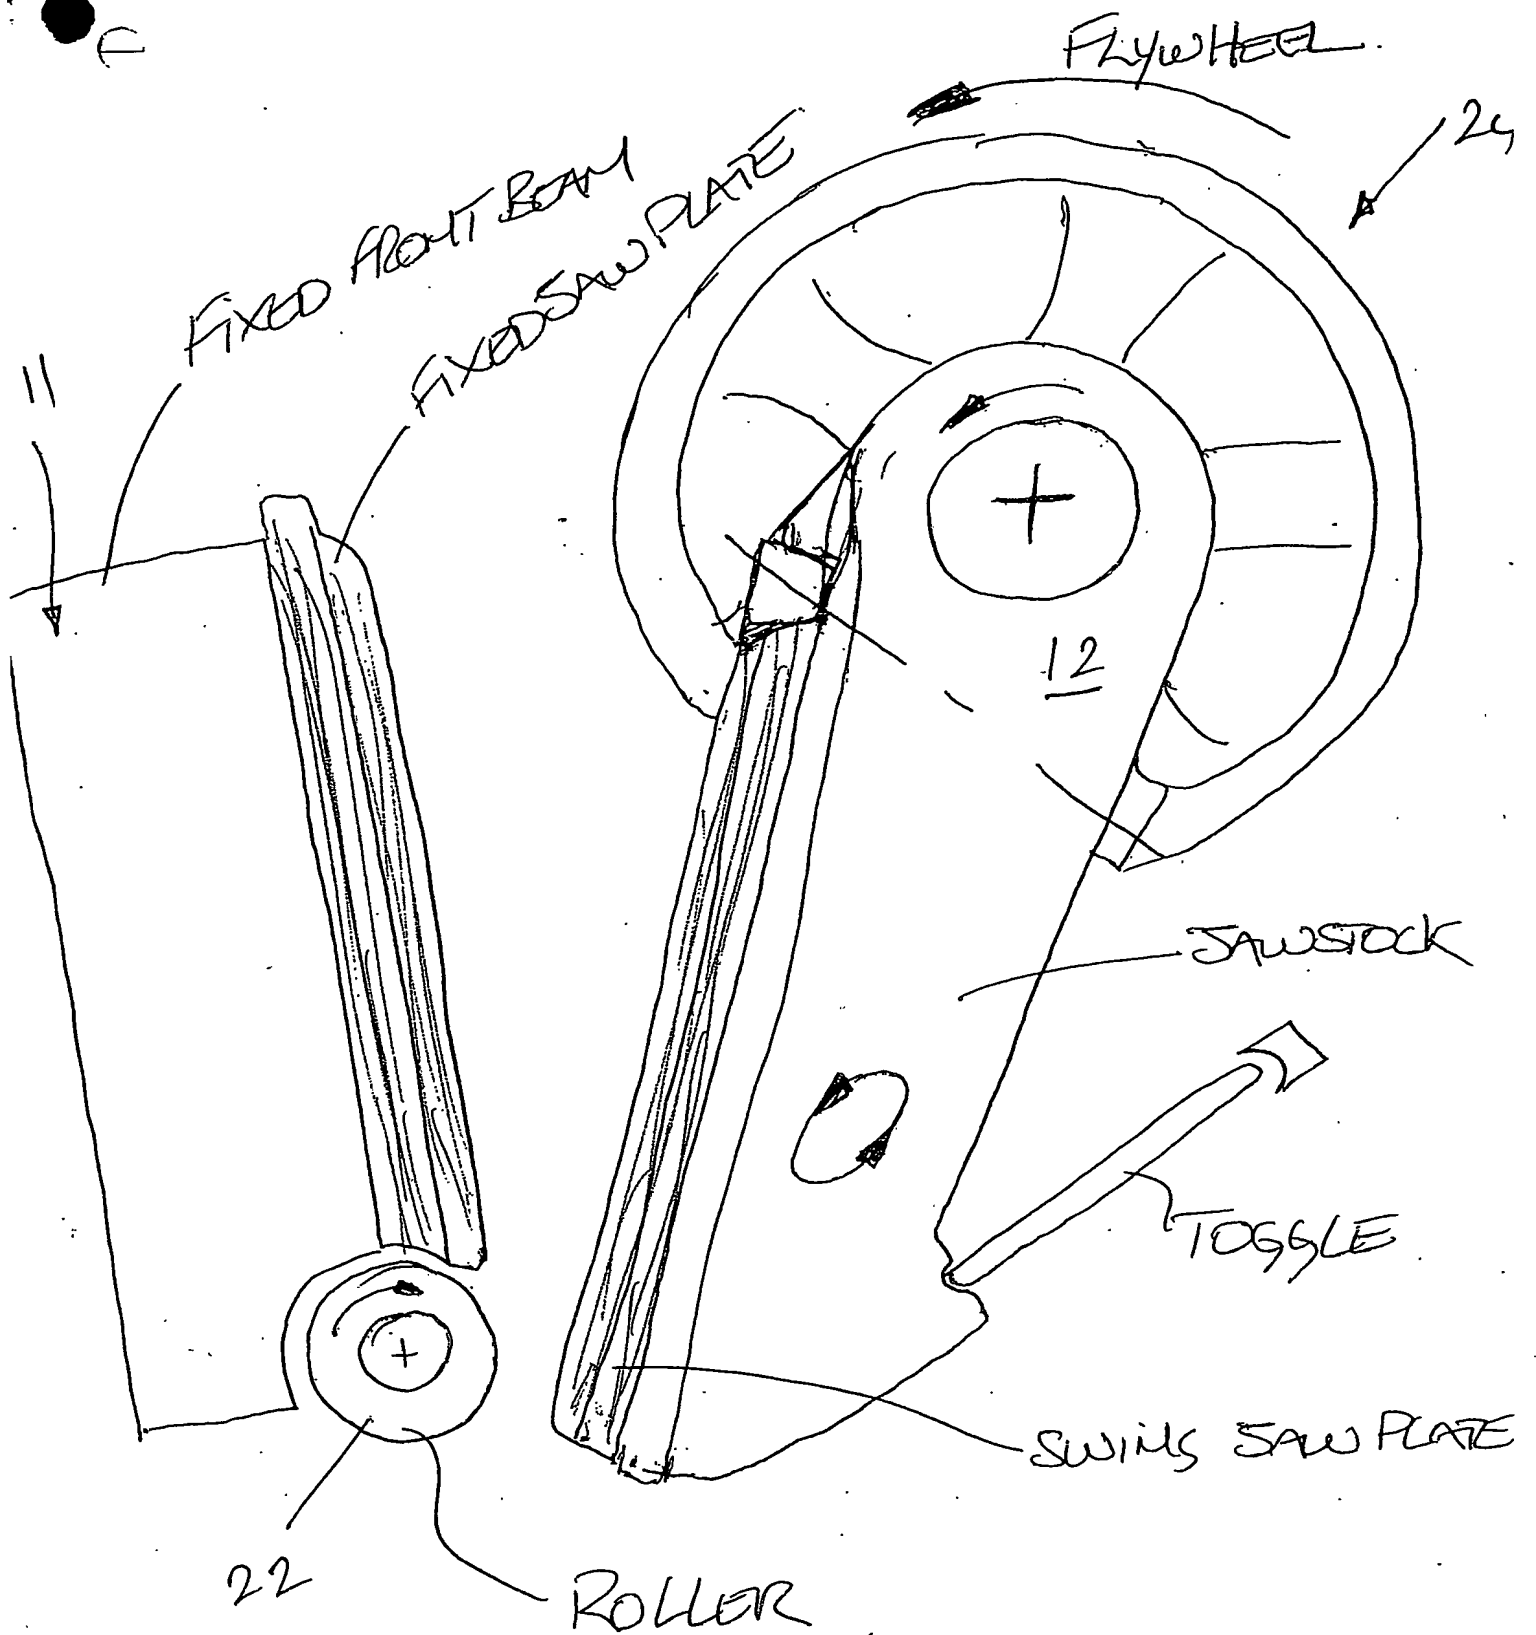

INVENTOR PAUL DOUGLAS

28/01/2003

FIG. 5

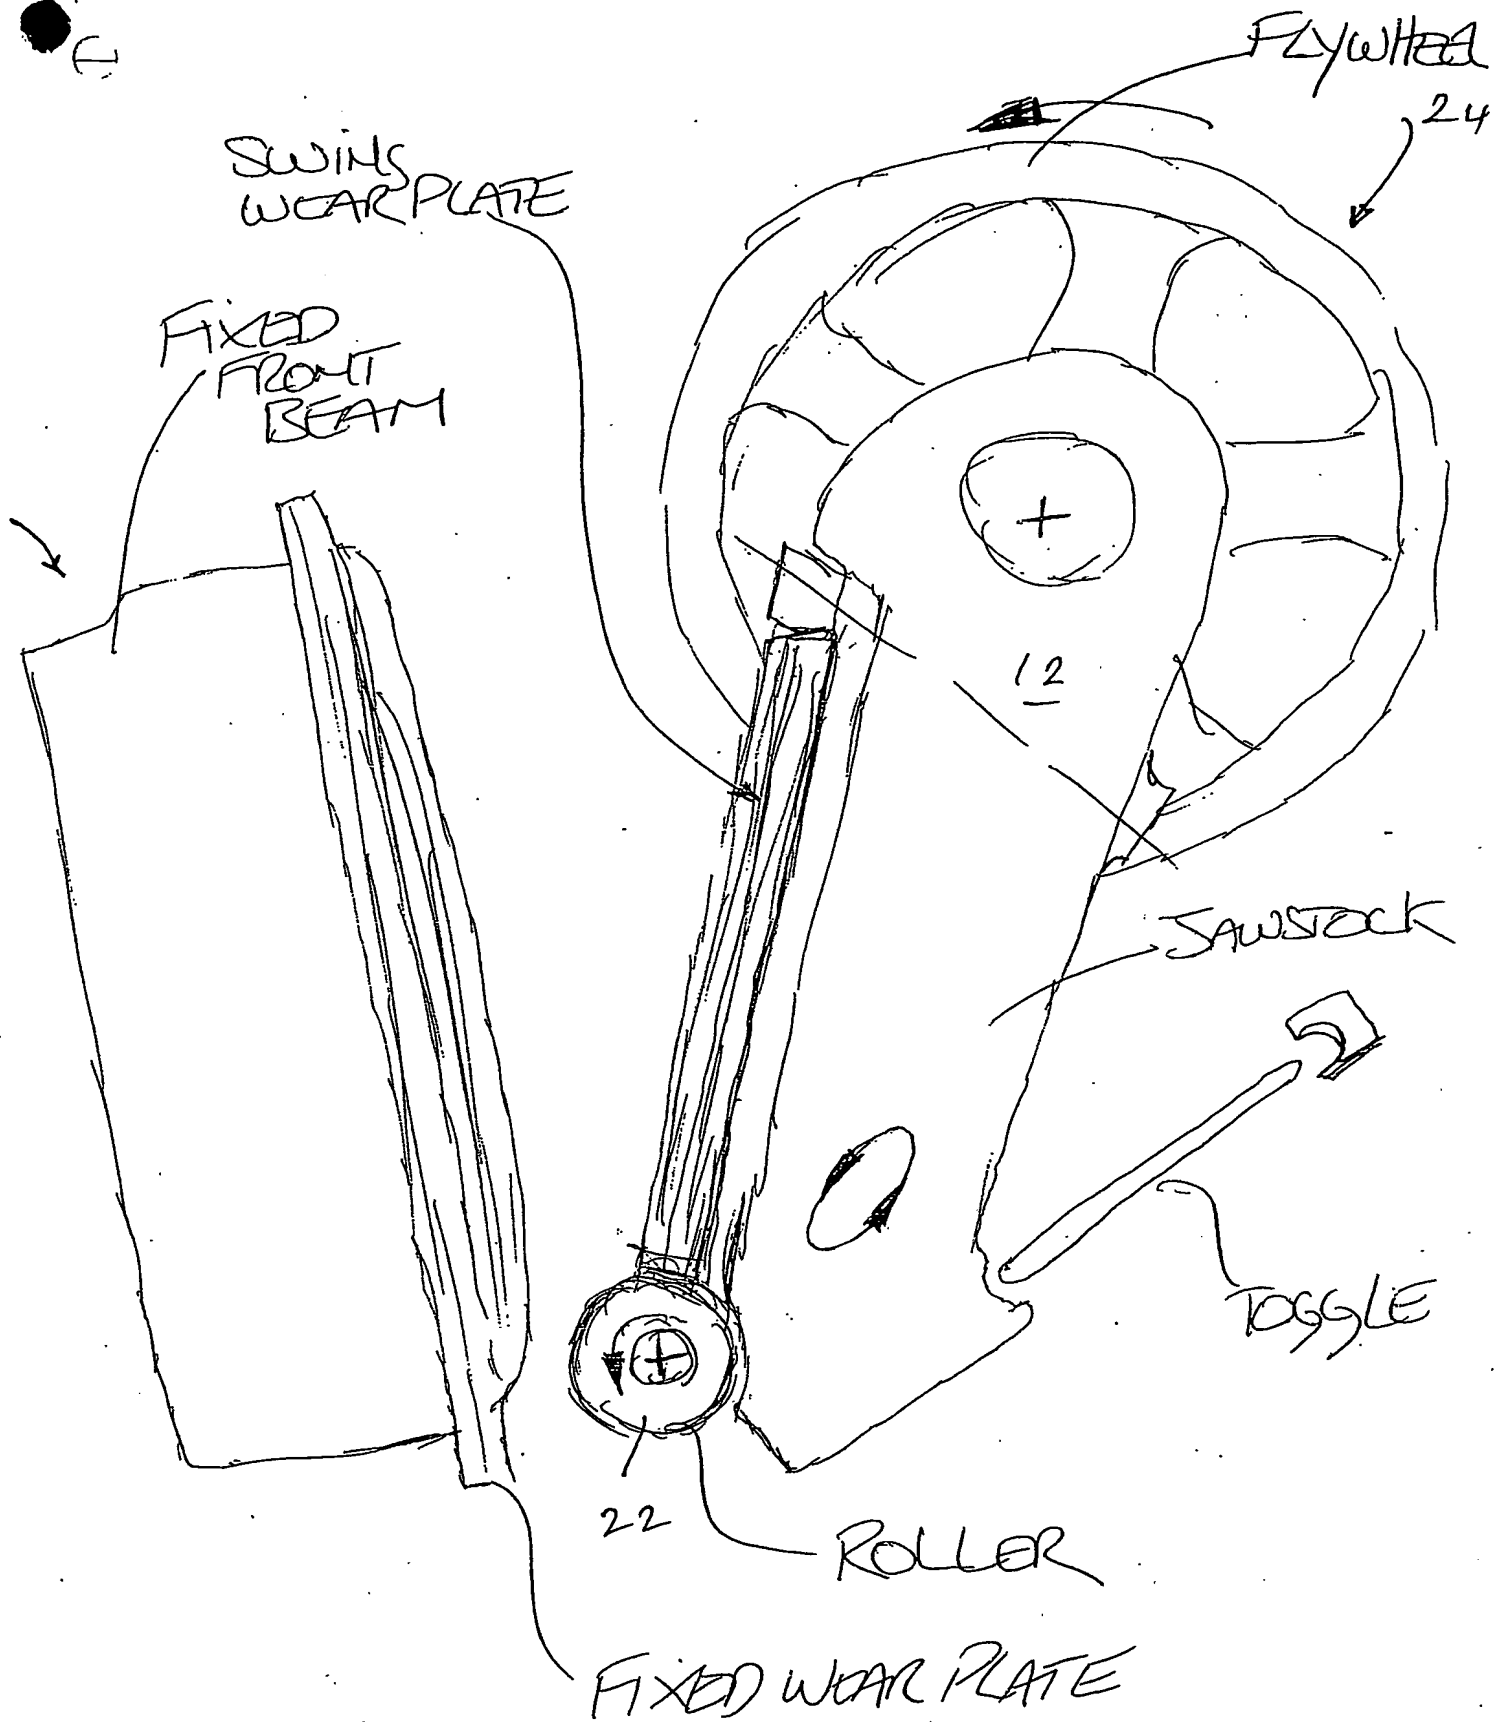

INVENTOR PAUL DOUGLAS  
28/01/2003

FIG. 26

This Page is inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record

## BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images  
problems checked, please do not report the  
problems to the IFW Image Problem Mailbox**